

BGR-LP Eco Combustor

A Division of ClearRushCo.

Model: BGR - 18LP Eco

The BGR-18LP Eco Combustor is a highly versatile, low cost vapour combustor designed to destruct volatile organic compounds (VOCs) and BTEXs produced from casing gas, oil storage tanks, or de-hys. The combustor eliminates the need to install expensive vapour recovery units (VRU) or large incinerators.

The high efficiency burner inside the combustor chamber provides low pressure continuous burning capabilities, high combustion efficiency, low emissions, reduced odours, no visible flame, and increased flame stability with excellent turndown ratios for low pressure applications.

Approvals

AER Directive 60 & Saskatchewan S 20


Meets or exceeds the US EPA NSPS 40 Subpart 0000 (Quad "O")

BMS Controller CSA approved for Class I Div 2 location

CSA B149.3-20, C22.2 No 199-M89

E60730-1-2013, ANSI Z21.20-2014

CAN/CSA C22.2 No. 60730-2-5-2014 Compliant, meets NFPA standards

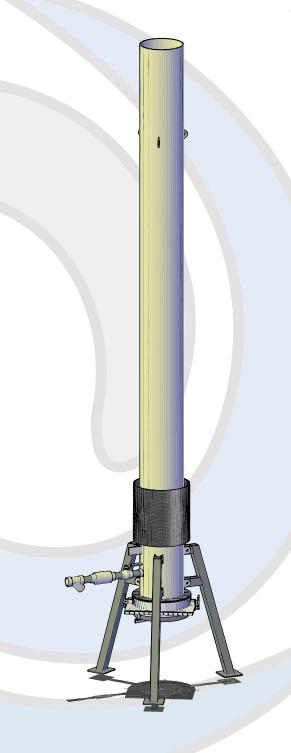

(See product specification sheet on reverse)

www.clearrushco.com

1-877-638-5234 (403) 638-5234

Clear Rush Co.
Box 1898, 5406 Township Road 325B
Sundre, AB T0M 1X0
Canada



BGR-LP Eco Combustor

A Division of ClearRushCo.

Model: BGR - 18LP Eco

Combustor Features

Destruction removal efficiency greater than 99.9% and meets the requirements of AER Directive 60 & Saskatchewan S 20 and US EPA NSPS 40 Subpart 0000 (Quad "O")

18" x 20' high stainless steel fire tube

Low pressure burner volume up to 20,000 scf/d or 566 m³/d

Operating pressures as low as 0.09 psi or 1.5 oz/in², up to 1.5psi

Able to handle intermittent flows easily

No visible flame

Excellent turndown ratio

Heat shield for operator's safety

Controller Features

CSA approved ACL3200 or CSC400 Ignition Control System (meets CSA B149.3-20)

Monitors and controls combustion

Remote Stop and Start

Auto re-light, continuous trial for ignition

Solar operated 12/24VDC (optional Rush Power available)

Thermocouple and thermowell for temperature sensing and monitoring (optional)

Data logging & acquisition capabilities

Modbus communication capabilities built in

Burner Features

Full stainless steel burner

Extremely stable at wide range of flow rates, down to 1.5oz/in²

No flame lift-off or impingement

Reduced emissions (low NOx, and low CO)

www.clearrushco.com

1-877-638-5234 (403) 638-5234

Clear Rush Co.
Box 1898, 5406 Township Road 325B
Sundre, AB T0M 1X0
Canada